
Linha de Montagem de Cabos de Alta Tensão

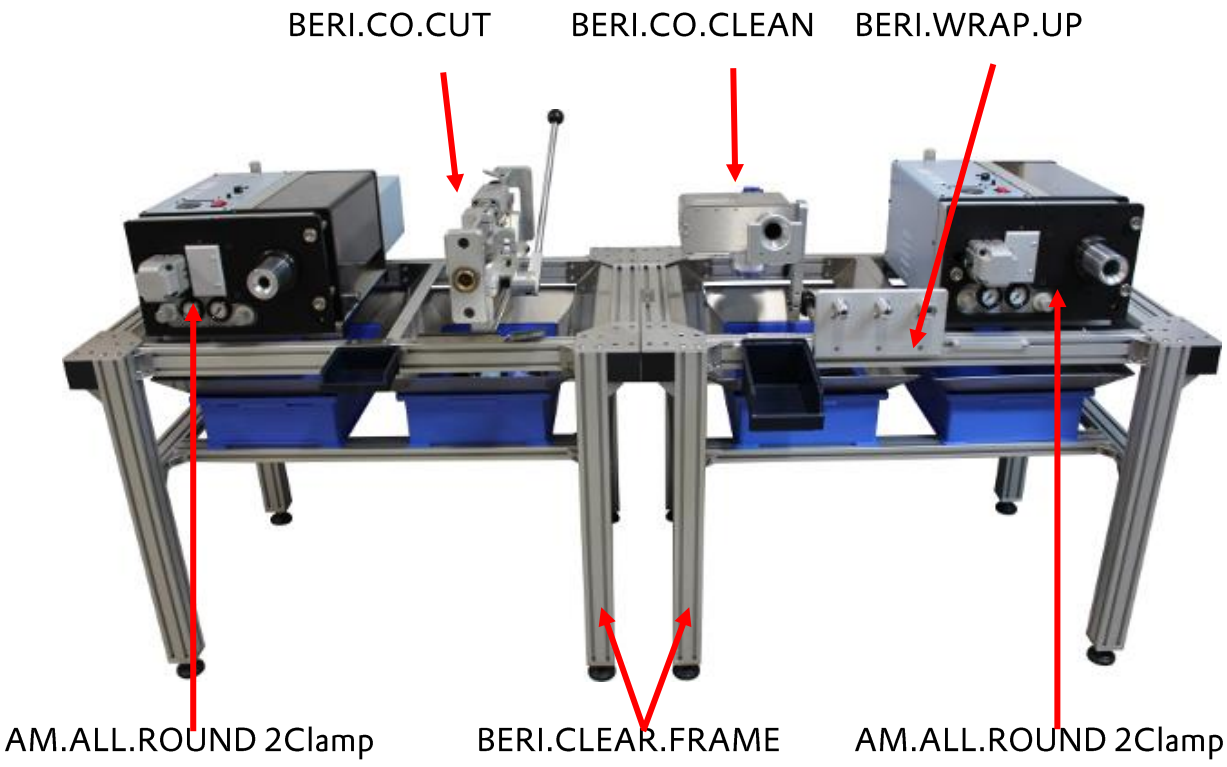

BERI.HV.LINE

Com a linha de montagem de cabos de alta tensão be-ri, a montagem dos cabos de alta tensão antes da subsequente montagem do conector é simples, rápida e flexível.

A linha é montada em conformidade com os requisitos e especificações do cliente. Todas as máquinas e aparelhos podem ser rapidamente convertidos para se adequarem aos respetivos cabos.

A linha da imagem supra está projetada para processar um cabo AT de 35 mm^2.

As máquinas utilizadas:

AM.ALL.ROUND 2Clamp
BERI.CO.CUT
BERI.CO.CLEAN
BERI.WRAP.UP
BERI.CLEAR.FRAME

Os passos a seguir são realizados com a linha supra (da esquerda para a direita):

- Descarnar o revestimento exterior
- Encurtar o entrançado
- Limpar o fio
- Abrir e rodar o entrançado (recorrendo ao anel de apoio)
- Descarnar o condutor interno (descarnação parcial)




Todas as máquinas no exemplo supra são montadas nas nossas novas mesas de montagem BERI.CLEAR.FRAME. O sistema da mesa permite um trabalho limpo com a eliminação dos materiais em excesso e um posicionamento ergonómico de todas as máquinas e aparelhos.

FEINTECHNIK
R.Rittmeyer GmbH
Höltenweg 103
48 155 Münster
Germany

Telefon: +49 . (0)251.96115–0
Telefax: +49 . (0)251.624 525
E-mail: info@rittmeyer-beri.de
Web: www.rittmeyer-beri.de

Assembly Line High Voltage Cables

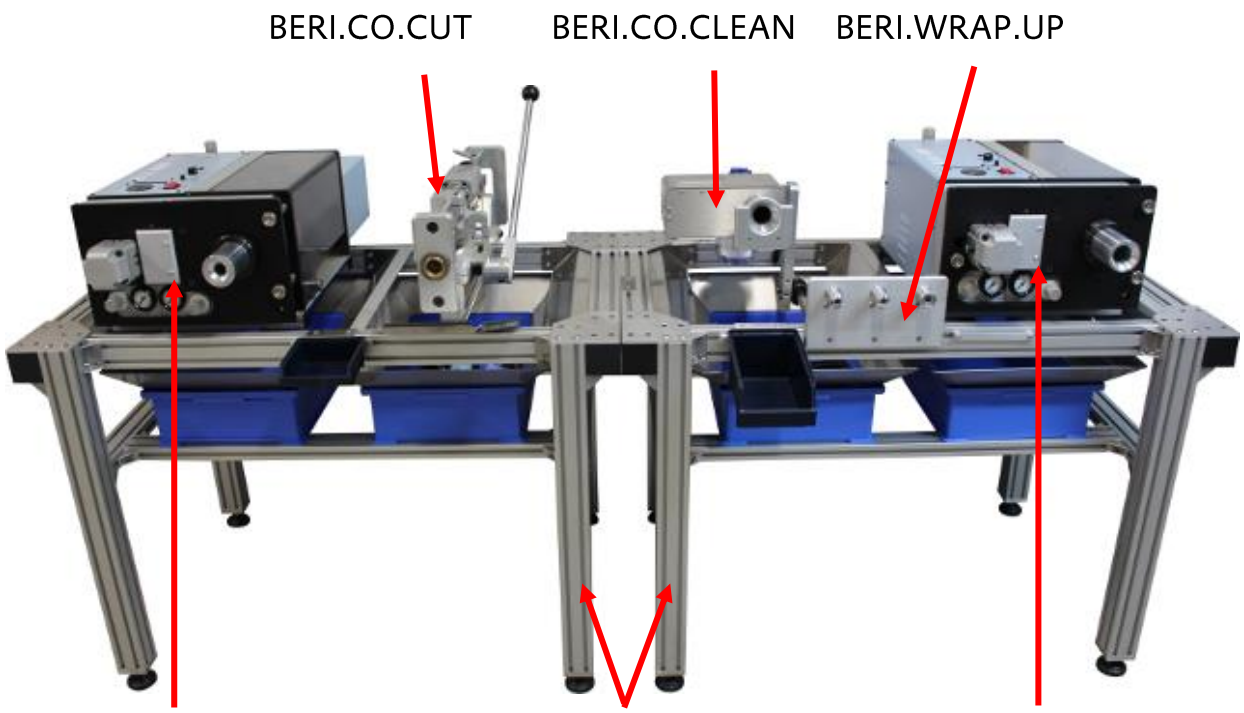

BERI.HV.LINE

With the be-ri high-voltage assembly line, the assembly of high-voltage cables before subsequent connector assembly is simple, fast and flexible.

The line is assembled according to requirements and customer specifications. All machines and devices can be quickly converted to the respective cable.

The line shown above is designed for processing a 35 mm^2 HV cable.

The used machines:

AM.ALL.ROUND 2Clamp
BERI.CO.CUT
BERI.CO.CLEAN
BERI.WRAP.UP
BERI.CLEAR.FRAME

The following steps are performed with the above line (from left to right):

- stripping the outer jacket
- braid shortening
- cleaning the line
- spreading and turning of the braid (via the support ring)
- stripping the inner conductor (partial strip)



All machines in the above example are mounted on our new assembly tables BERI.CLEAR.FRAME. The table system allows clean working with orderly waste disposal as well as ergonomic positioning of all machines and devices.

Reservamos o direito de efetuar alterações técnicas

We reserve the right to make technical alterations

Stand 12/2019