Pnömatik Sıyırma Makinası
Pneumatic Stripping Machine

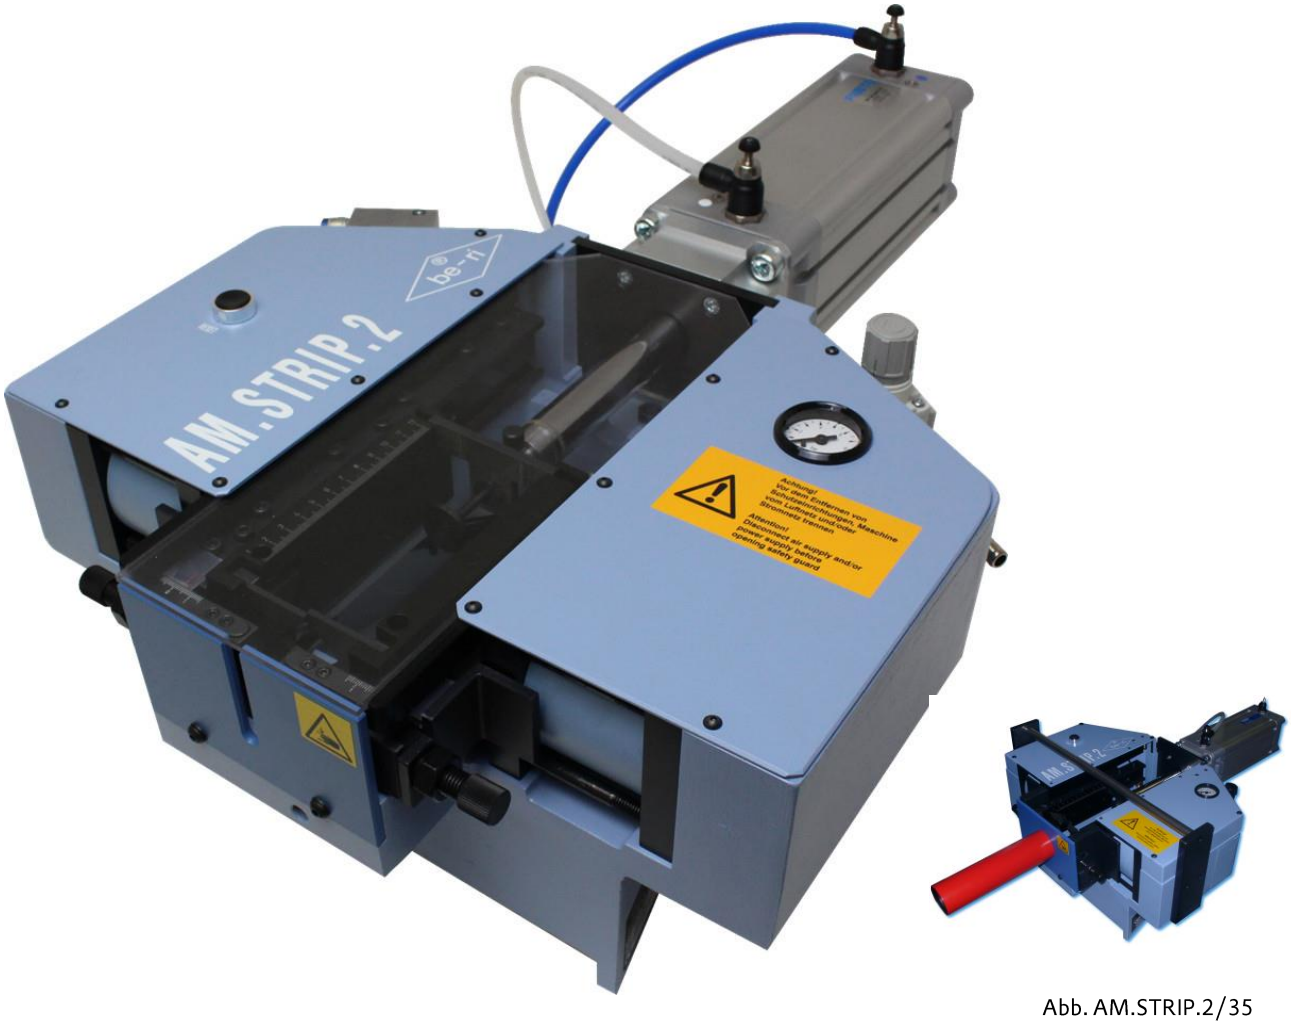


Abb. AM.STRIP.2/35

AM.STRIP.2 AM.STRIP.2V AM.STRIP.2/35 AM.STRIP.2S

Die AM.STRIP.2, AM.STRIP.2 V, AM.STRIP.2/35 ve AM.STRIP.2S küçük ila orta serilerin ekonomik üretimi için evrensel bir yarı otomatik soyma makinesidir. İşlenecek kabloya özel bıçaklar ile, piyasada bulunan neredeyse tüm kabloların işlenmesine olanak tanır. Makinenin tüm takımları, alet kullanmadan birkaç saniye içinde değiştirilebilir.

Makine, prizma bıçakları kullanılırken, kablo kılıfına bağlı olarak temel ayarda kesiti 6 mm^2'ye kadar olan diğer kablolarda otomatik olarak uyum sağlayabilir.

Varyasyon: pnömatik sensörlü

The AM.STRIP.2, AM.STRIP.2 V, AM.STRIP.2/35 and AM.STRIP.2S are universal semi-automatic stripping machines for the economical production of small to medium series. The use of special knives to suit the cable being processed allows nearly all standard cables to be handled. All machine retooling can be done in seconds without tools.

When prism blades are used, the machine in some cases automatically adapts to other cross-sections of up to 6 mm^2 in the basic setting - depending on the cable.

Variations: with pneumatic sensor

be-ri®

FEINTECHNIK
R.RITTMEYER GMBH
Höltenweg 103
48 155 Münster
Germany

Telefon: +49 . (0)251.96115–0
Telefax: +49 . (0)251.624 525
E-mail: info@rittmeyer-beri.de
Web: www.rittmeyer-beri.de

Sıyırma AM.STRIP.2

Yuvarlak kablolar:	1 – 25 mm – Ø dış çap
Yassı kablolar:	35 mm genişliğe kadar
Max. sıyırma uzunluğu:	120 mm

Özel Versiyonlar

AM.STRIP.2/35	35 mm – Ø dış çap 120 mm'ye kadar uzatılması mümkün değildir
AM.STRIP.2 V	230 mm'ye kadar
AM.STRIP.2S	110 mm'ye kadar uzatılması mümkün değildir

Boyutlar

G x D x Y:	430 x 550 x 200 mm
AM.STRIP.2 V	430 x 680 x 235 mm

Standart Donanimlar

1 Ayak valfi
1 Burçlu ön plaka
1 Kılavuzlu tutucu plaka
1 Çift prizmatik bıçak
1 strok sınırlayıcı (Yalnızca " AM.STRIP.2 V" için)

Stripping AM.STRIP.2

Round cables:	from 1,0 – 25 mm outer-Ø
Flat band cables:	up to 30 mm width
max. strip length:	up to 120 mm

Special Versions


AM.STRIP.2/35	up to 35 mm outside- Ø up to 120 mm stripping length; no extended stop possible
AM.STRIP.2 V	up to 230 mm
AM.STRIP.2S	up to 110 mm no extended stop possible

Dimensions

W x D x H	:	430 x 550 x 200 mm
AM.STRIP.2 V		430 x 680 x 235 mm

Standard Accessories

1 Foot valve
1 Front plate with sleeve
1 Holding plate with pipe
1 Pair of prismatic blades
1 stroke limitation (Standard only at AM.STRIP.2 V)

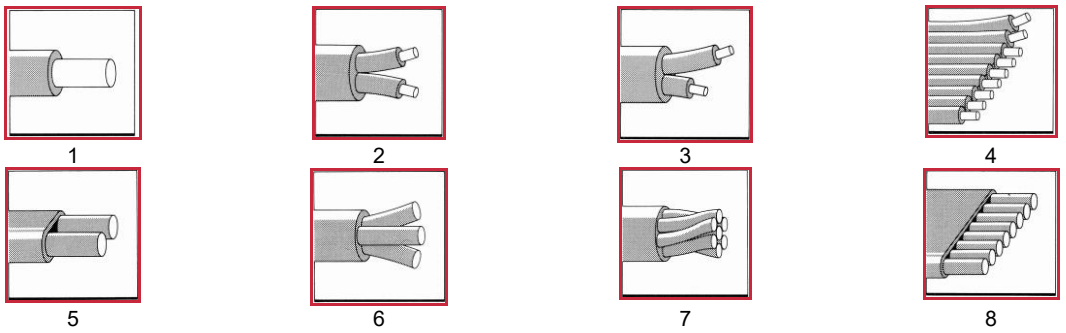

Özel Cihazlar (isteğe bağli)

Dilimleme Cihazı (Şekil. 4)
- yassı kabloları keser ve sıyırır

Özel kesici başlıklar(Şekil. 2 + 3)
- aşamalı veya 2 adımlı işleme için kullanılır (test ve montajı fabrikamızda yapılmalıdır)

Sıyırma durdurucu
- Ø 16 mm'ye kadar kablo çapları için daha büyük sıyırma uzunluğu sağlar (yarı sıyırma)

Strok sınırlayıcı
- yarı sıyırma işlerinizde daha hızlı çalışma sağlar

Pnömatik sensör
(AM.STIRP.2V ve AM.STRIP.2/35 cihazları için uygun değildir)

Special Devices (optionally)

Slitting device (see 4)
- for slitting and stripping with band cables

Special blade head constructions (see 2 + 3)
- for graduated or 2step processing (tests and construction are necessary in our company)

Stripping stop dog
- for greater stripping length (partial stripping) up to Ø 16 mm max.

Stroke limitation
- for partial stripping and quicker working

Pneumatic sensor
(not available on AM.STRIP.2V and AM.STRIP.2/35)